



rado-x

The "Rado-X" surface-mounted LED wall lights are a versatile choice for outdoor lighting needs. Designed specifically to illuminate walls and adjacent areas, these lights excel in highlighting architectural features, creating ambiance, and boosting security. Their sleek design allows them to integrate seamlessly with their surroundings, providing effective lighting while enhancing the overall aesthetics of the space.

MATERIAL

Body	: Pressure die-cast aluminium
Impact Protection	: IK07
Ingress Protection	: IP65
Lens	: Polycarbonate optical lens
Diffuser	: Clear toughened glass
Reflector	: Aluminium
Gasket	: Silicone
Mounting	: Pressure die-cast aluminium wall mounting base

ELECTRICAL

Driver	: Standard
Power Supply	: Integral
Input Voltage	: 230-240Vac / 50-60 Hz
Surge	: 4KV

PRODUCT CONFIGURATIONS


Wattage	: 12W / 24W
Light Distribution	: Asymmetrical / Type II
LED Life Time	: L70 B10 60,000 H

AREA OF APPLICATION

Building facade, Commercial centres, Passages, Pathways, Sculptures and Structures.

Available Finish

Pure polyester powder coated
RAL 9004 Black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey

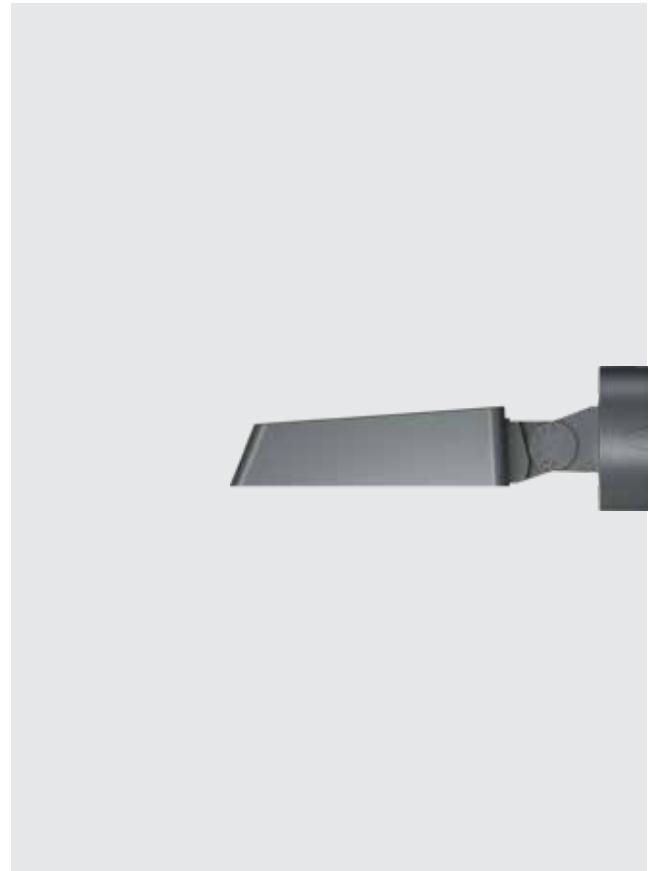



Technical Specifications

General

ID	: 24465
System Wattage	: 12W / 24W LED
Driver Integrated	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-Cast Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Surface - Wall
Finish	: Powder coated
	RAL 9004 Black
	RAL 9007 Grey aluminium
	RAL 7016 Anthracite grey
	Graphite grey

Light Source


Light Source	: CITIZEN / LUMILEDS
CRI (Ra)	: 90 / 80
LED Colour Temperature	: 2700K / 3000K / 4000K 6500K for COB / 5700K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.9
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >80%

Optical Performance


Light Distribution	: Asymmetrical / Type II
--------------------	--------------------------

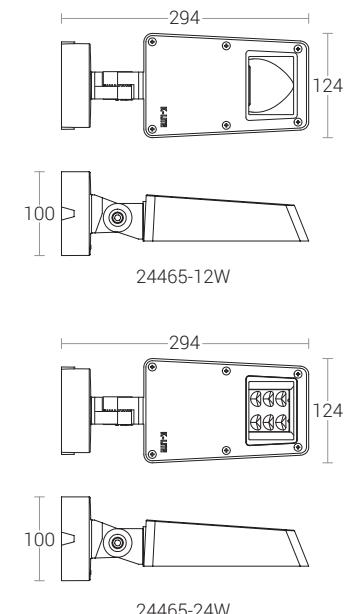

Photometric Data



12W - Asy. Light Pattern



24W - Type II

