

The design ensures that the light is soft yet effective, creating a pleasant ambiance while minimizing harshness or distraction. Crafted with a robust, aesthetically appealing construction, the cyrilla round is built to withstand all weather conditions, providing reliable performance over time. Its durable materials and design ensure that it maintains its initial lighting quality throughout the lifetime of the installation, making it a smart and long-lasting lighting solution for outdoor spaces.

MATERIAL

Body	: Pressure die-cast aluminium & Extruded aluminium supporting arm
Ingress Protection	: IP54
Diffuser	: Clear / Translucent polycarbonate
Gasket	: Silicone gasket
Mounting	: Suitable for mounting on 60mm OD pipe.

ELECTRICAL

Driver	: Standard
Power Supply	: Integral
Input Voltage	: 230-240Vac / 50-60 Hz
Surge	: 4KV

PRODUCT CONFIGURATIONS

Wattage	: 30W
Light Distribution	: Symmetrical
CCT	: 2700K / 3000K / 4000K / 5700K
LED Life Time	: L70 B10 1,00000 H


AREA OF APPLICATION

Suitable for gated community and low traffic areas.

AVAILABLE FINISH

Pure polyester powder coated
RAL 9004 Black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey



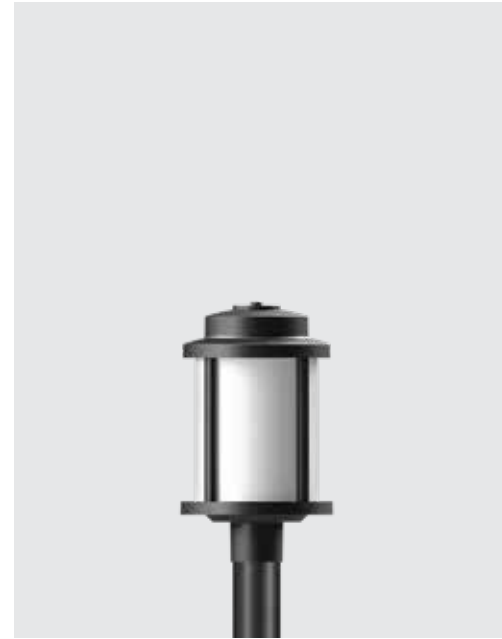

Technical Specifications

General

ID	: 22792
System Wattage	: 30W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die Cast Aluminium alloy
Diffuser	: Clear / Translucent Polycarbonate
Mounting	: Suitable for Mounting on 60mm OD Pipe
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: ≥80
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.9
THD	: <10%
Surge Protection	: 4kV
Efficiency	: >85%

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------



BESPOKE DESIGN OPTIONS FOR TRANSLUCENT DIFFUSER

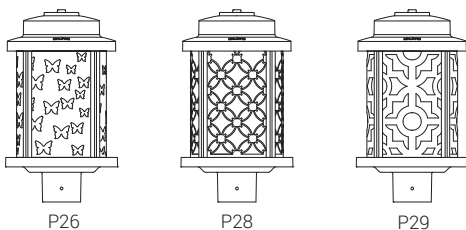

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in