

Proxima series adopt the energy-saving, environmental LED lamp. It is a Perfect lamp with high luminous efficiency, prominent energy saving effect and long lifespan. Also with no radialization, no strobe flash, gentle light. It's appearance is refined and elegant.

Product Description

- Adjustable spot light with adapter for installation on track. Luminaire made of die cast aluminium 360° on vertical axis and 90° tilt.
- The body of LED spot light adopt aluminium alloy which has excellent mechanical strength, extruded aluminium for better thermal management.
- Adopting reflector which is with excellent optics effect and excellent spot light effect.
- Two circuit connector, directionally adjustable, convenient installation and maintenance.
- Luminaire provided with built-in-constant current driver with advanced circuit design achieves stable performances and long services span.
- Integral constant current power supply.
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-23679-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 6500K



Product Benefits

- Excellent efficiency for high energy savings of up to 80% compared to CFL downlights.
- Replacement of existing CFL downlights with even better performance.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.

Area of Application

Retail Sector, Receptions, Large shopping malls, Brand sales, Museum / Art Gallery display, etc.

Available Finish

White / Black epoxy polyester powder coating.



ACCESSORIES



67803	1 Metre 2 Wire Track
63206	2 Metre 2 Wire Track
67807	I Connector
67814	L Connector
67819	T Connector
67824	+ Connector



68661	1 Metre 2 Wire Track
68662	2 Metre 2 Wire Track
68663	I Connector
68664	L Connector
68665	T Connector
68666	+ Connector



OPEN SOURCE



Technical Specifications

General

ID	: 23677
System Wattage	: 12W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: Clear Polycarbonate
Mounting	: Ceiling Surface / Adjustable
Finish	: White / Black epoxy polyester powder coating

Light Source


Light Source	: CITIZEN
CRI (Ra)	: >80 (90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 6500K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Optical Performance

Colour Temperature	: 3000K
Luminous flux	: 661 lm
Beam Angle	: 24°

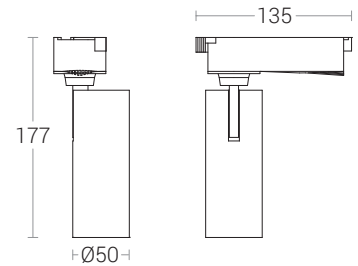

Light Distribution



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in



OPEN SOURCE



Technical Specifications

General

ID	: 23678
System Wattage	: 20W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: Clear Polycarbonate
Mounting	: Ceiling Surface / Adjustable
Finish	: White / Black epoxy polyester powder coating

Light Source


Light Source	: CITIZEN
CRI (Ra)	: >80 (90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 6500K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Optical Performance

Colour Temperature	: 4000K
Luminous flux	: 1225 lm
Beam Angle	: 24°

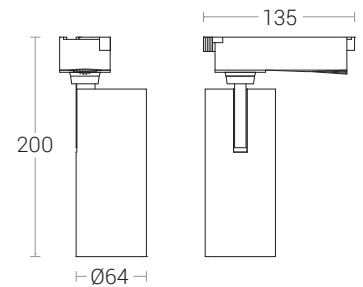

Light Distribution



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in



OPEN SOURCE



Technical Specifications

General

ID	: 23679
System Wattage	: 30W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: Clear Polycarbonate
Mounting	: Ceiling Surface / Adjustable
Finish	: White / Black epoxy polyester powder coating

Light Source


Light Source	: CITIZEN
CRI (Ra)	: >80 (90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 6500K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%

Optical Performance

Colour Temperature	: 3000K
Luminous flux	: 2505 lm
Beam Angle	: 24°



Light Distribution



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in