

Technical Specifications

General

ID	: 22792
System Wattage	: 30W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die Cast Aluminium alloy
Diffuser	: Clear / Translucent Polycarbonate
Mounting	: Suitable for Mounting on 60mm OD Pipe
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: ≥80
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.9
THD	: <10%
Surge Protection	: 4kV
Efficiency	: >85%

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------



BESPOKE DESIGN OPTIONS FOR TRANSLUCENT DIFFUSER

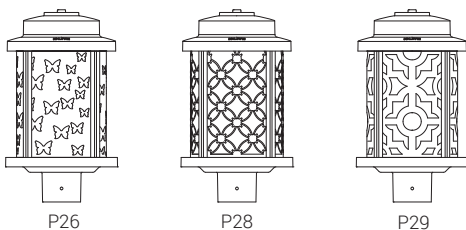

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in