

Technical Specifications

General

ID : 4560
 System Wattage : 6W LED
 Driver Non-Integral : Constant Voltage
 Operating Voltage : 24Vdc
 Operating Temperature : -15°C~+50°C

Light Source

Light Source : LUMILEDS / OSRAM
 CRI (Ra) : ≥80
 LED Colour Temperature : 2700K / 3000K / 4000K / 5700K

Physical




Body : Stainless Steel Pipe with Die-Cast Aluminium
 Diffuser : Clear acrylic
 Mounting : Surface / Earth spike
 Finish : Polyester powder coated
 RAL 9004 Signal black
 RAL 9007 Grey aluminium
 RAL 7016 Anthracite grey
 Graphite grey

Driver

Power Supply : Non-Integral

Optical Performance

Light Distribution : Symmetrical

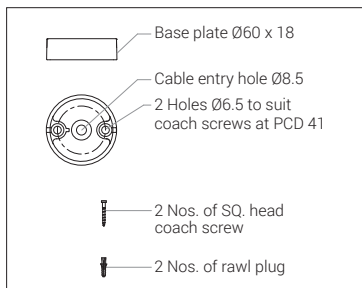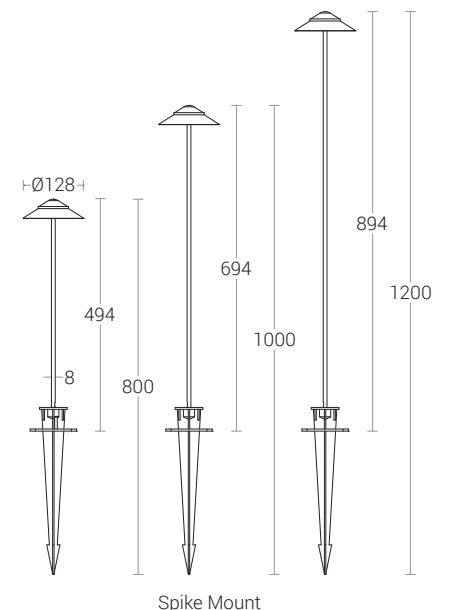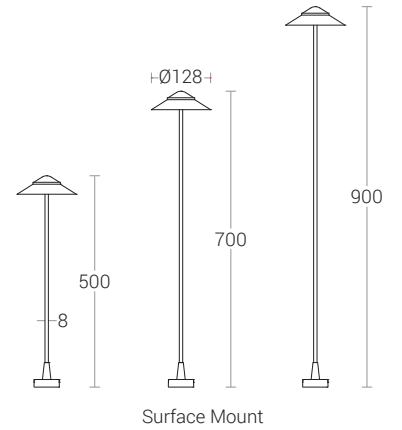

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in