

Technical Specifications

General

ID : 5139
 System Wattage : 100W LED
 Driver Integral : Constant Current
 Input Voltage : 230-240Vac
 Frequency : 50-60Hz
 Operating Voltage : 100-277Vac
 Operating Temperature : -15°C~+50°C

Light Source

Light Source : OSRAM / LUMILEDS
 CRI (Ra) : >70
 LED Colour Temperature : 2700K / 3000K / 4000K / 5700K

Physical


Body : Spun Aluminium
 Diffuser : Clear acrylic (A9) / Clear Polycarbonate (A12)
 Mounting : Suitable for mounting to internally threaded pipe of designation M30
 Finish : Powder coated
 Graphite grey / Jet black
 Anthracite grey

Driver

Power Supply : Integral
 Power Factor : >0.95
 THD : <10%
 Surge Protection : 6KV
 Efficiency : >88%

Optical Performance

Optical Distribution : Type IV

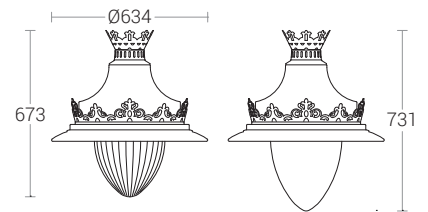

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in